

Sentinel Pro II / SHT11

Wi-Fi® Temperature Sensor

802.11, 2.4GHz Radio

Battery-Powered

Up to 2 external T probes

Optional internal T & RH sensor (SHT11)



Applications

The Sentinel products are ideal for storage applications where continuous monitoring is required.

- Health Care
- Food Storage
- Transportation
- Ware Housing
- Server Rooms
- Military

Features

The complete solution includes the sensor, wireless transceiver, database and a web-based portal.

- Form Factor – 3"x 2"x 1"
- Web-based Data Visualizationⁱ
- Up to 3 Years Life using a single Lithium AA batteryⁱⁱ
- Alarming/Alerting Systemⁱⁱⁱ
- Uses the Wi-Fi Infrastructure
- Audit Trail of the Sensor Data
- test

Benefits

No wireless receiver is necessary as it uses the existing Wi-Fi infrastructure – therefore the overall cost is significantly lower; full sensor audit trail; data can be viewed remotely from any computer using a web browser; sensor units are battery operated therefore portable; sensor units can last up to 3 years using a single Lithium AA battery(*).

Technical Specifications

Sensor Unit

Data Storage	At least 21 days of sensor data at sampling rate of once per minute (10 days with optional T&RH probe)
Data Visualization & Reporting	Desktop Software, Web Hosted or Enterprise Portal
Alerting System	Email or cell phone alerts when sensor crosses set threshold values (depending on Software version)
Power supply	Using a single AA 3.6V Lithium battery - Expected life of up to 3 years (*)
Operating conditions	Operating temp. range: -10°C to +60°C Operating humidity range 0% RH to 90% RH non-condensing
Physical dimensions	3.3"L X 2.5"W x 0.8"H (82mm x 62mm x 21mm) Weight: 2.3oz (66g)
Regulatory	FCC
Typical power emission	33mW

Wi-Fi

Radio Protocol	IEEE 802.11b (b/g compatible)
Supported rates	1, 2, 5.5 and 11 Mbps
Security	WPA2-PSK (AES) WPA1-PSK (TKIP) WPA1+2 PSK (AES+TKIP) 802.1x EAP-FAST WEP (40bit, 104bit)

Networking


Addressing	IP v4 static or DHCP address
Protocol used to communicate with server	SNMP/UDP, UDP
Ports	161-163 on both server and sensor

Probes

External Temperature Sensors	<p>Up to 2 Identical Probes can be attached.</p> <p><u>XPROBE-TEMP-0002</u> Range: -30°C to 10°C Resolution: 0.1°C Probe Accuracy: $\pm 0.5^{\circ}\text{C}$ (-20°C to 10°C) and $\pm 1^{\circ}\text{C}$ (-30°C to 10°C)</p> <p><u>XPROBE-TEMP-0004</u> Range: 0°C to 70°C Resolution: 0.1°C Probe Accuracy: $\pm 0.1^{\circ}\text{C}$</p> <p><u>XPROBE-TEMP-0006</u> Range: -30°C to 50°C Resolution: 0.1°C Probe Accuracy: $\pm 0.5^{\circ}\text{C}$ (-20°C to 10°C) and $\pm 0.55^{\circ}\text{C}$ (-30°C to 50°C)</p>
Light Sensor	Responsivity: 400-1000 nm (spectral)
Internal Ambient Humidity (SHT11 version only)	Range: 0-100% RH Resolution: 0.03% RH Accuracy: $\pm 3.0\%$ RH
Internal Ambient Temperature (SHT11 version only)	Range: <i>same as unit operating range</i> Resolution: 0.01°C (typical) Accuracy: $\pm 0.4^{\circ}\text{C}$ (typical at 25°C)

Maximum Temperature Accuracy Limit

With calibrated circuit and
XPROBE-TEMP-0006
temperature probe

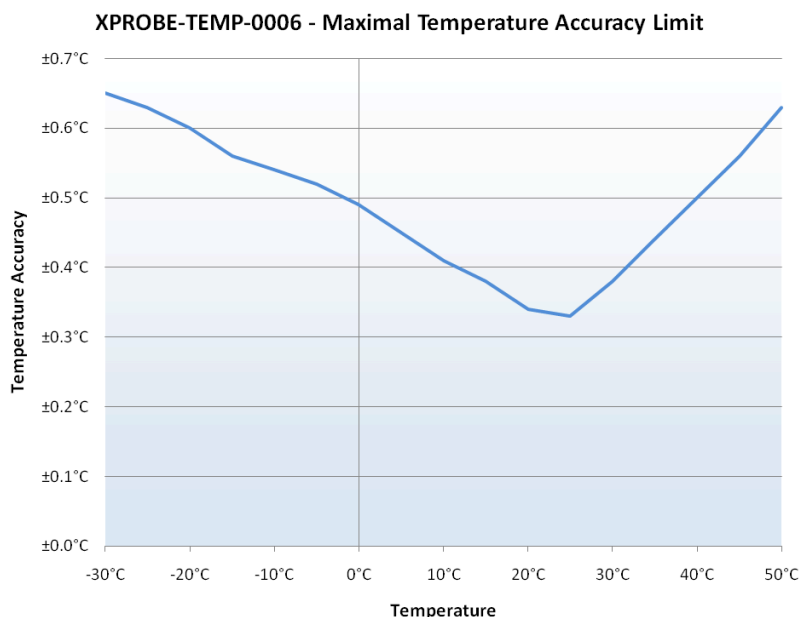

About Aginova

Aginova Inc. is a wireless sensor network solution provider. The Company will provide the packaged wireless sensor hardware with the data acquisition and management software using leading-edge Internet and Web technologies.

Find us on the internet:



www.aginova.com and www.icelsius.com

Contact us:

U.S. Office:

Aginova Inc.
7552 Central Park Blvd.
Mason, OH 45044
Phone: +1 513 204 5837
Fax: +1 732 879 0248
info (at) aginova.com

European Office:

Aginova Sàrl
PSE-D, EPFL
CH-1015 Lausanne, Switzerland
Phone: +41 21 693 8691
Fax: +41 21 693 8692
info-ch (at) aginova.com

ⁱ Available separately: Desktop Software, Web Hosted Portal or Enterprise Portal

ⁱⁱ Battery Life varies depending on network conditions and sensor settings

ⁱⁱⁱ Available only with Web Hosted, Enterprise and Desktop Software Gold Edition